



IWAKI  
METERING  
PUMPS

LK




Solutions for chemical handling applications

# Applicable to the many diverse needs of chemical feeding

Iwaki's systematic LK series metering pump consists of the worm gear type dual-cam driving section, which is compact yet rigid and reliable, and wet-end materials of which there are seven types for various applications.

With long and market-proven experience, Iwaki has employed state-of-the-art pump technologies in the development of an ideal type of chemical feeding pump which has advantages such as quality, performance, ease of operation and cost efficiency.

The LK series is suitable for many chemical liquid feeding processes used in a wide range of fields, including water treatment, chemicals, fabrics, paper mill, food processing, and medicine.

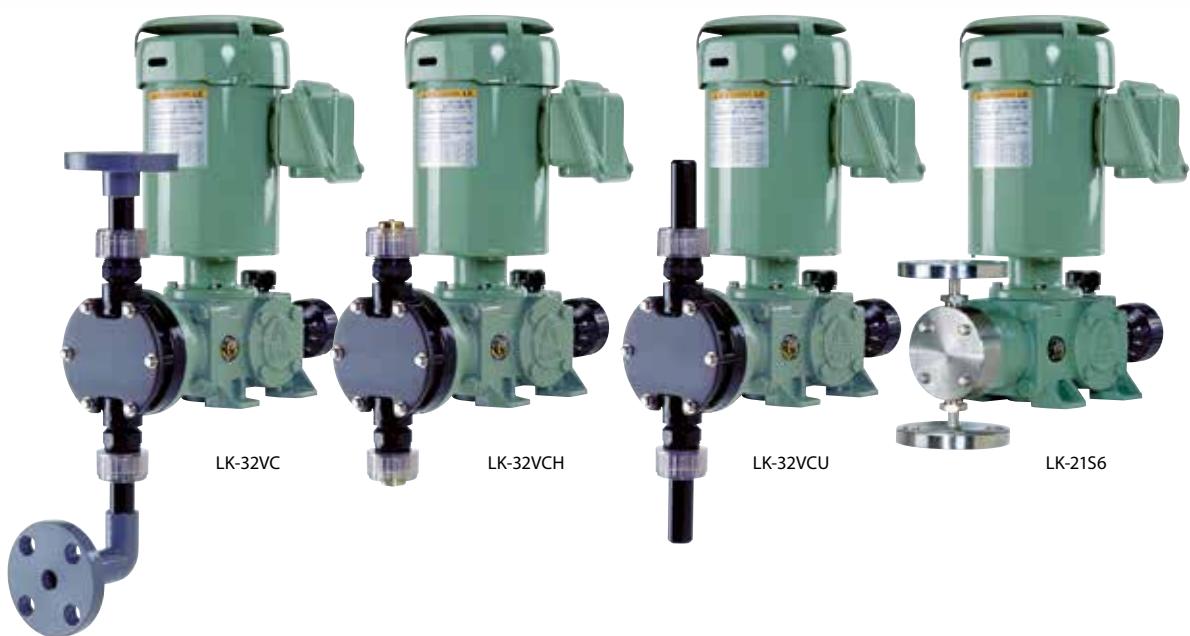



### Various types and materials


Nine types (IWAKI original motor) and eight general purpose motor types are available to suit each user's needs in accordance with feeding rate from small to large capacity. Also, material variation has been improved. Selection of the pump material most suitable for the applied liquid is possible with seven different types available.

### High performance and application-oriented versatile design

Discharge accuracy (stability) is within  $\pm 2\%$  FS. Reliability is considerably enhanced through efforts to improve the linearity of the stroke / discharge ratio as well as the dispersion between stroke. Three types of joints flange, hose and union joints are standardized for the connections. The optimum piping system can be selected. (Only with 0.2kW IWAKI original motor type)



## Construction

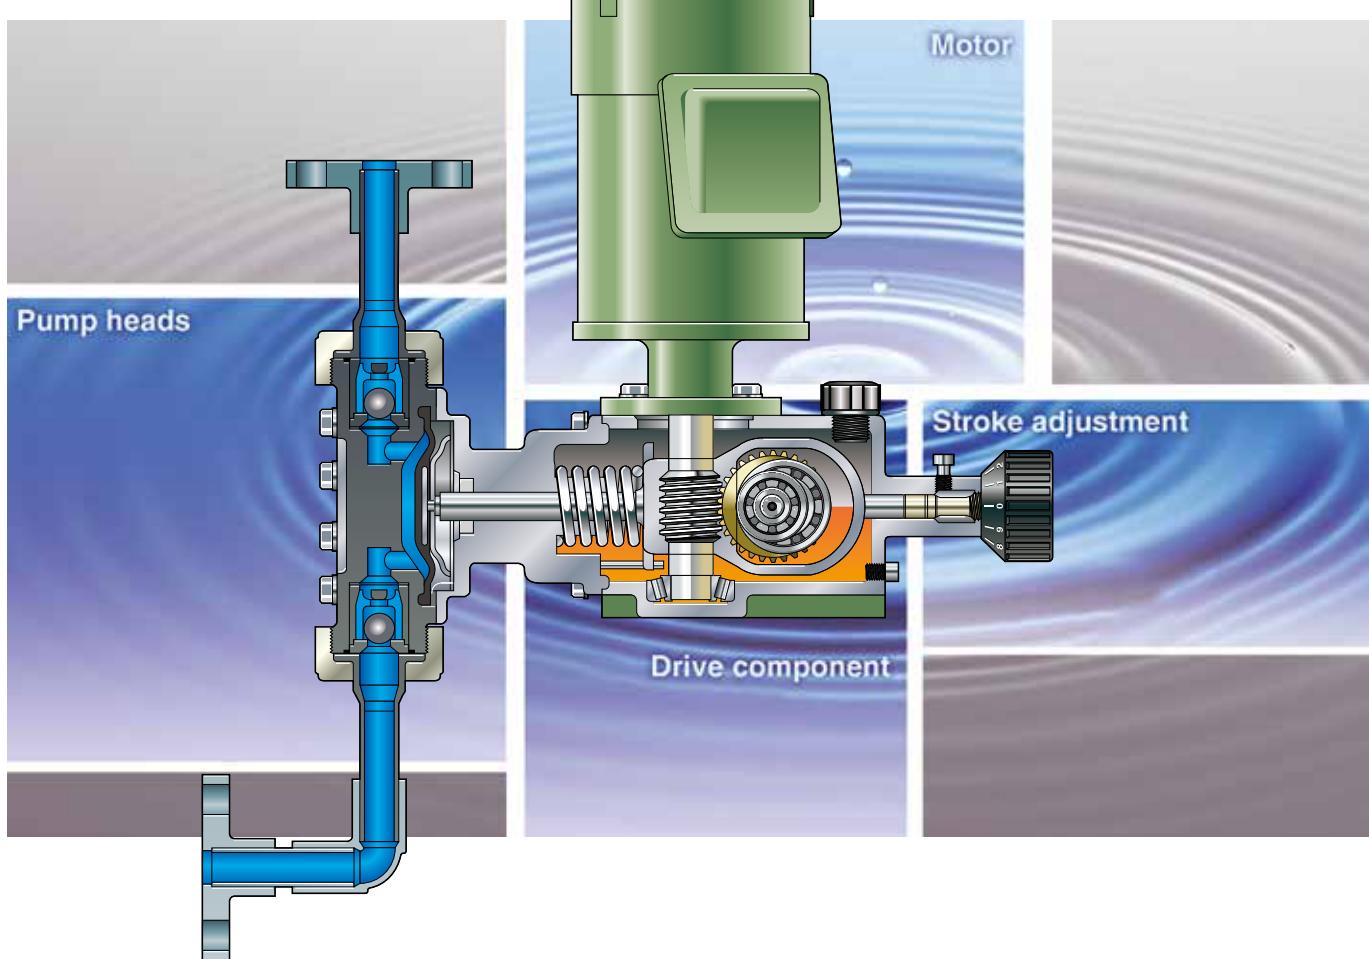

### Pump heads

Drive from the gear reduction unit is directly transmitted to the diaphragm. This type of metering pump is economical and simple with a high degree of versatility. With the employment of moulded PVC pump-head, and with the new standardisation of three types of connections using flanges, hose, or union joints (0.2kW type), not only a saving in parts cost but also improved flexibility of installation has been realized. The three main pump head materials are PVC, stainless steel, or fluororesin. The most suitable type for the application can be selected from a total of seven different materials. A wide range of chemicals, such as acid, alkaline, organic solvent, slurry, and high-temperature liquids, is covered by the series.

• Please contact us for Model PVDF.

### Drive component

The head of the LK series is the dual-cam system driving section with a highly reliable, built-in worm gear type speed reducer. The compact and rigid mechanism is a result of the design goal to achieve maximum wear resistance in continuous operation. In addition to the worm gear which is designed with a considerably large module ratio, the material is aluminium bronze, and a taper roller bearing is used at the end of the worm gear for the efficient transmission of motor power to the pump section. A fully enclosed oil bath lubrication system is employed to permit outdoor installation. The durability in continuous operation over a long period of time is also excellent.



### Motor


All of the standard models employ totally enclosed outdoor-use motors which are vertically mounted to save space. The 0.2kW type is an IWAKI original motor, which is installed in the small models of the LK series. Besides the standard 200V, other voltages are available. The LK series pumps of LK-F, LK-A, LK-B, and LK-C can be installed with general-purpose motors, including those for different voltage levels and explosion-proof specifications. Body configurations of the LK series are available in five types. They are an IWAKI original motor type frame and the general-purpose motor type frames, F, A, B and C.

### Stroke adjustment

Accurate and reliable stroke setting is possible with the micrometer type dial of the springback type stroke adjustment mechanism. An electric servo unit for automatic process control, such as flow, pressure, pH, temperature, and concentration can be arranged according to the user's needs.

#### Electric servo system Specifications

- Input signal : DC4 - 20mA (or 1 - 5V)
- Power source : AC100V 50/60Hz; other voltage types available Voltage fluctuation 10%
- Motor output : LK (0.2kW) 15W  
LK-A, B, C 40W

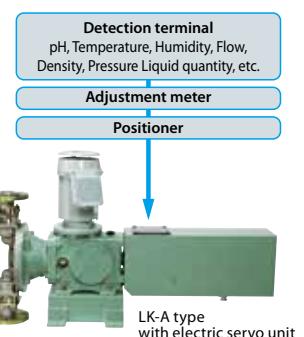

## Specifications

Model	Capacity L/min		Max. Pressure MPa		Stroke speed spm		Effective diaphragm dia. Ømm	Connection			Motor output kW	Approx net weight kg			
	Note 1		Note 2					Flange (JIS10K)	Union	Hose Ømm		Note 3			
	50Hz	60Hz	PVC	SUS	50Hz	60Hz						Note 4	PVC		
LK-11	0.020	0.024	1.0	1.5	48	58	22	1.5	15A (PVC)	VP16 (PVC)	4 x 9 (PVC)	0.2 (Three phase) or 0.25 (Single phase)	12 17 21 16 26		
21	0.050	0.060			96	116	30	2.0					12 17		
22	0.10	0.12			48	58	60	2.5					14 21		
31	0.25	0.30			96	116	72	6.0	JIS16K (SUS)	VP25 (PVC)	12 x 18 (PVC)		16 26		
32	0.50	0.60			48	58	100	10			-				
45	0.85	1.00			48	58	25A								
47	1.7	2.0			96	116	100	10							
55	2.8	3.3	0.5	0.7	48	58	138	17.5	40A	0.4	63 70 73	100 105 105			
57	6.0	7.2			96	116	48	58	138		-				
LK-A55	2.8	3.3			48	58	150	20	40A		-				
A57	6.0	7.2	0.7		96	116	72	86	50A	0.75	120	120 140 155			
A65	9.0	10.8	0.3		48	58	205	20	50A		-				
B65	9.0	10.8	0.5		96	116	96	116	65A		-				
B75	13.3	16.0	0.5												
C76	20	24	0.5												
C86	33	40	0.3												
C87	45	54													

Note 1: The capacity is the value when maximum discharge pressure is applied (with pure water at room temperature). The value may be larger than indicated in the table if the discharge pressure is lower.

As for the liquid conditions pumped and performance, refer to the technical information of this catalogue.

Note 2: The maximum discharge pressure of LK-A models are restricted to 0.7MPa for A55, 0.5MPa for A57 and 0.2MPa for A65 when IEC standard 0.37kW motor is adopted.

Note 3: VS type connection is different in some models from standard.

Note 4: The LK type is equipped with Iwaki original flange motor. The standard is 200V 3-phase, totally enclosed fan-cooled outdoor type.

Other motors for different voltages, explosion-proof motors, or single-phase motors are available.

LK-F, LK-A, B and C are to be installed with general purpose flange motors.



Note 5: The weight is the value when installed with a totally enclosed fan-cooled outdoor motor.

• Standard accessory : A siphon preventing valve, strainer and 4m PVC tube are furnished to hose connection type of simplex LK-11 to LK-45 VH or VC A base is furnished to all LK-A, LK-B and LK-C models. For LK-(F) 11 to LK-(F) 57 models, the base may be supplied optionally.

• Coating color : F37-60D (JPMA) (However, the motors for LK-F/A/B/C use the maker's standard color.)

• Duplex type : LK-11 to 47 type include duplex types with a special-use integrated drive section.

## Materials

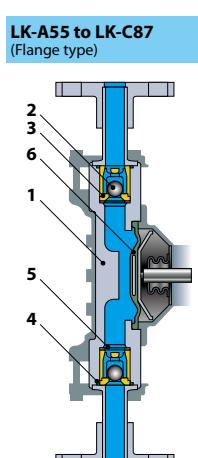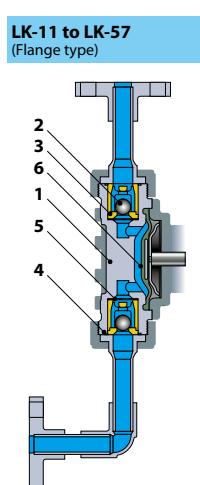

Type	VC	VH	VS4	VS	S6	S4				
Application	Acids	Alkalines		Viscosity and Slurry	Solvents					
Applicable type	11 to 87	11 to A57	A65 to C87	11 to C87	11 to A57	A65 to C87				
1: Pump head	PVC					SUS316 SCS13				
2: Valve ball	CE	HC	SUS304	HC / SUS304	HC	SUS304				
3: Valve Type11 to 32 seat Type45 to 87	FKM	EPDM	PVC	SUS304	SUS316	SUS304				
4: O ring	FKM	EPDM		-						
5: Valve gasket	PTFE					PTFE				
6: Diaphragm	PTFE + EPDM									
Typical chemical	Material symbols									
VC: Sulfuric acid, Hydrochloric acid, Sodium hypochlorite	SCS13: Stainless-cast steel equivalent to SUS304									
VH, VS4: Caustic soda, Coagulant, Calcium hydroxide (low density)	CE: Ceramic									
VS: Calcium hydroxide, Highmolecular coagulant	FKM: Fluoro rubber									
S6, S4: Organic solvent, Paper making chemicals	EPDM: Ethylene propylene rubber									
	HC: Hastelloy C276									


• Materials of the VS type valve balls are HC for 11 to A57 type and SUS304 for B65 to C87 type.

As for the connection, which is different in some models from standard.

• A stainless steel pump SE type for latex emulsion is available (LK-31 to 57 type).

• Material PVdF is also available. Please contact us for details.

## Pump identification

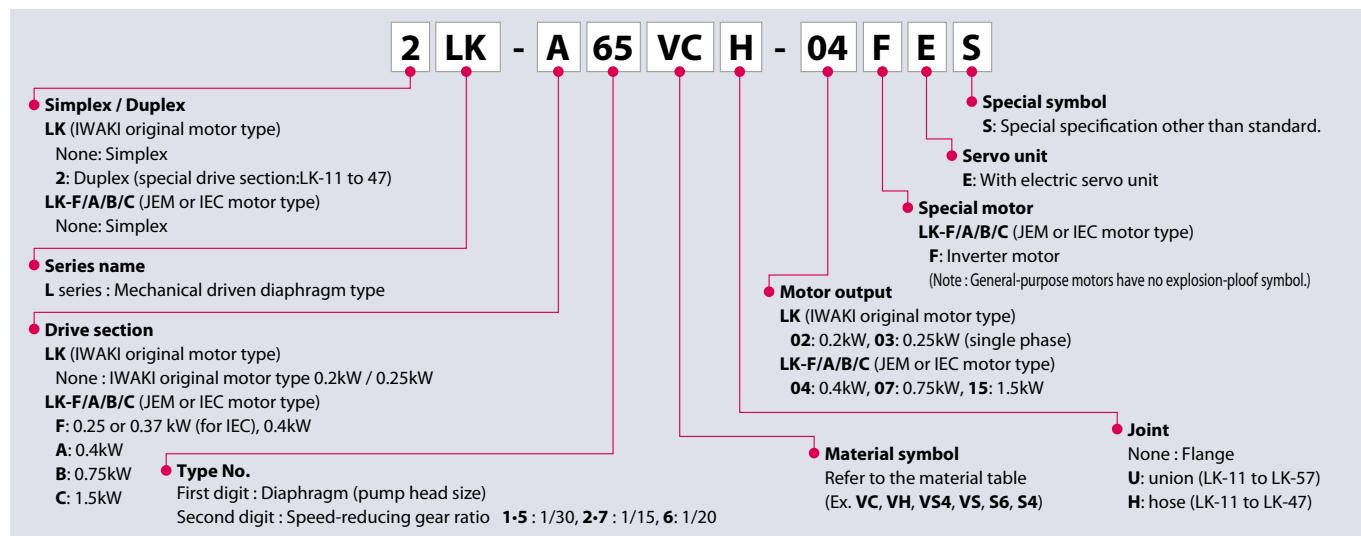

\* This table does not introduce the standard combination. Please contact us for details.  
\* In case of pump without motor installation, the above item 7 and 8 are not indicated.



## Optional accessories

### Siphon preventing valve

Model	BVC-1P□L-□H	BVC-1P□-□H
Applicable capacity	Up to 1L/min	
Setting pressure	0.05 - 0.2MPa	0.2 - 0.8MPa
Material	PVC, FKM (EPDM)	
Connection mm (Applicable tube diameter)	Inlet 4 x 9, 12 x 18 Outlet PT3/8 and PT1/2	

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)



### Air chamber

Body	Model	Applicable capacity L	Setting pressure MPa	Connection Nominal size JIS10K flange	Weight kg
PVC	A-1V□	1.0	0.5	Common for 15A - 25A	2
	A-2V□	2.0			2.5
	A-5V□	5.0			4.5
	N40A-10V(2)-F *	10		40A	16
	N50A-20V(2)-F *	20		50A	26
	N65A-30V(2)-F *	30		65A	49
SUS316	A-05S6-( )	0.5	0.9	10, 15, 20A	3
	A-1S6-( )	1.5		15, 20, 25A	5
	A-5S6-( )	5.0		25, 40A	12
	A-10S6-( )	10		40, 50A	15
	A-20S6-( )	20		50, 65A	29
	A-36S6-( )	36		65A	55

\*: Material for O-ring 10V / 20V / 30V for CR, 10V2 / 20V2 / 30V2 for FKM

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

( ): Symbol for connection (10, 15, 20, 25, 40, 50 or 65)

• The weight is the value of the product only. (The weight of liquid applied is not included.)

• Rigid PVC chamber may deteriorate with ultraviolet ray or the applied chemical liquid over a long period of time. The chamber should be replaced every three years to guarantee safety.



### Relief valve and back pressure valve



#### List of relief valve

Body	Model	Max. capacity L/min	Setting pressure MPa	Connection Nominal size JIS10K flange	Weight kg
PVC	RV-1P □-4H	1.0	0.3 - 0.8	ø4 x ø9 PVC Hose	0.2
	RV-1P □-12H	1.0	0.3 - 0.8	ø12 x ø18 PVC Hose	0.2
	RV-1P □-15	1.0	0.3 - 0.8	15A	0.5
	RV-1P □-20	1.0	0.3 - 0.8	20A	0.5
	RV-1P □-B-15	1.0	0.8 - 1.0	15A	0.5
	RV-3P-15	3.0	0.3 - 1.0	15A	0.6
	RV-3P-20	3.0	0.3 - 1.0	20A	0.6
	RV-3P-25	3.0	0.3 - 1.0	25A	0.9
	RV-3P □-12H	3.0	0.3 - 1.0	ø12 x ø18 PVC Hose	0.4
	RV-7V-20	7.5	0.3 - 0.8	20A	3.5
	RV-7V-25	7.5	0.3 - 0.8	25A	3.5
	RV-7VB-20	7.5	0.8 - 1.0	20A	3.5
	RV-7VB-25	7.5	0.8 - 1.0	25A	3.5
	RV-25V-25	25	0.3 - 0.8	25A	4
	RV-25V-40	25	0.3 - 0.8	40A	4
	RV-25V-50	25	0.3 - 0.8	50A	4.5
	N50RV-5V-F	50	0.15 - 0.5	50A	20
	N50RV-5V2-F	50	0.15 - 0.5	50A	20
SUS	N65-50RV-5V-F	70	0.15 - 0.5	65A	20
	N65-50RV-5V2-F	70	0.15 - 0.5	65A	20
	RV-25G-15	2.0	0.3 - 0.8	15A	3.5
	RV-25G6-15	2.0	0.8 - 1.5	15A	3.5
	RV-7G6-25	7.5	0.3 - 0.8	25A	6
	RV-7G6-25	7.5	0.8 - 1.5	25A	6
	RV-25G6-25	25	0.3 - 0.8	25A	7.0
	RV-25G6B-25	25	0.8 - 1.0	25A	7.0
	RV-25G6-40	25	0.3 - 0.8	40A	7.5
	RV-25G6-50	25	0.3 - 0.8	50A	8.7
SUS	RV-25G6B-40	25	0.8 - 1.0	40A	7.5
	N50RV-55G-F	80	0.15 - 0.5	50A	29
	N65RV-55G-F	120	0.15 - 0.5	65A	42

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

O-ring material of N type is "5V2" for FKM.

• Material for diaphragm is PTFE except RV-1P and N type.

Material of diaphragm is same as O-ring material at RV-1P and N type.

#### List of back pressure valve

Body	Model	Max. capacity L/min	Setting pressure MPa	Connection Nominal size JIS10K flange	Weight kg
PVC	BV-1P □-4H	0.005 - 1.0	0.2 - 0.8	ø4 x ø9 PVC Hose	0.2
	BV-1P □-12H	0.005 - 1.0	0.2 - 0.8	ø12 x ø18 PVC Hose	0.2
	BV-1P □-15	0.005 - 1.0	0.2 - 0.8	15A	0.5
	BV-1P □-20	0.005 - 1.0	0.2 - 0.8	20A	0.5
	BV-1P □-L-4H	0.005 - 1.0	0.05 - 0.2	ø4 x ø9 PVC Hose	0.2
	BV-1P □-L-12H	0.005 - 1.0	0.05 - 0.2	ø12 x ø18 PVC Hose	0.2
	BV-1P □-L-15	0.005 - 1.0	0.05 - 0.2	15A	0.5
	BV-1P □-L-20	0.005 - 1.0	0.05 - 0.2	20A	0.5
	BV-3P □-12H	0.03 - 3.0	0.1 - 0.8	ø12 x ø18 PVC Hose	0.4
	BV-3N □-12H	0.005 - 3.0	0.1 - 0.3	ø12 x ø18 PVC Hose	0.4
	BV-3N □-15	0.005 - 3.0	0.1 - 0.3	15A	0.6
	BV-3N □-20	0.005 - 3.0	0.1 - 0.3	20A	0.6
	BV-3N □-25	0.005 - 3.0	0.1 - 0.3	25A	0.9
	BV-7V-20	0.2 - 7.5	0.05 - 0.8	20A	3.5
	BV-7V-25	0.2 - 7.5	0.05 - 0.8	25A	3.5
	BV-25V-25	2 - 25	0.1 - 0.8	40A	4
	BV-25V-40	2 - 25	0.1 - 0.8	50A	4.5
SUS	BV-25V-50	2 - 25	0.1 - 0.8	50A	18
	N50BV-5V-F	2.5 - 50	0.15 - 0.5	50A	18
	N50BV-5V2-F	2.5 - 50	0.15 - 0.5	50A	18
	N65-50BV-5V-F	5 - 70	0.15 - 0.5	65A	20
	N65-50BV-5V2-F	5 - 70	0.15 - 0.5	65A	20
	BV-25G-15	0.02 - 2.0	0.05 - 0.8	15A	3.5
	BV-7G6-25	0.2 - 7.5	0.05 - 0.8	25A	6.0

□ : Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

O-ring material or N type is "5V2" for CR, or "5V2" for FKM.

• Material for diaphragm is PTFE except BV-1P and N type.

Material of diaphragm is same as O-ring material at BV-1P and N type.

• The back pressure valve can not curb the residual flow completely when the pump stops.

Use the solenoid valve in order to shut out the residual flow.

